

PS2-4000 HRE-05HSL Energy-2

Solar Submersible Pump System for 4" oil and gas wells

System Overview

Head max. 2.300 ft
Flow rate max. 4,2 USG/min

Technical Data

Controller PS2-4000 Energy

- Solar direct or via PowerPack
- Control inputs for dry running protection, remote control etc.
- Controlling and monitoring
- Programmable pump cycles and flow rates
- Integrated data logger with Bluetooth

Power max. 4,0 kW
Input voltage max. 375 V
Optimum Vmp** > 238 V
Motor current max. 14 A
Efficiency max. 98 %
Ambient temp. -40...122 °F
Enclosure class IP68

Motor ECDRIVE 4000-HRE Energy

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor
- Plug connection

Rated power 5,4 HP
Efficiency max. 92 %
Motor speed 900...3.300 rpm
Insulation class F
Enclosure class IP68
Submersion max. 1.640 ft

Pump End PE HRE-05HSL Energy-2***

- Stilling tube for solid reduction
- Premium materials, stainless steel: AISI 304/316
- Tungsten plated rotor
- Helical rotor pump

Efficiency max. 79 %

Pump Unit PU4000 HRE-05HSL Energy-2 (Motor, Pump End)

Borehole diameter min. 4,0 in
Fluid temperature max. 122 °F

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

***Specify temperature range on order




PS2-4000 HRE-05HSL Energy-2

Solar Submersible Pump System for 4" oil and gas wells

Pump Chart

Vmp* > 238 V

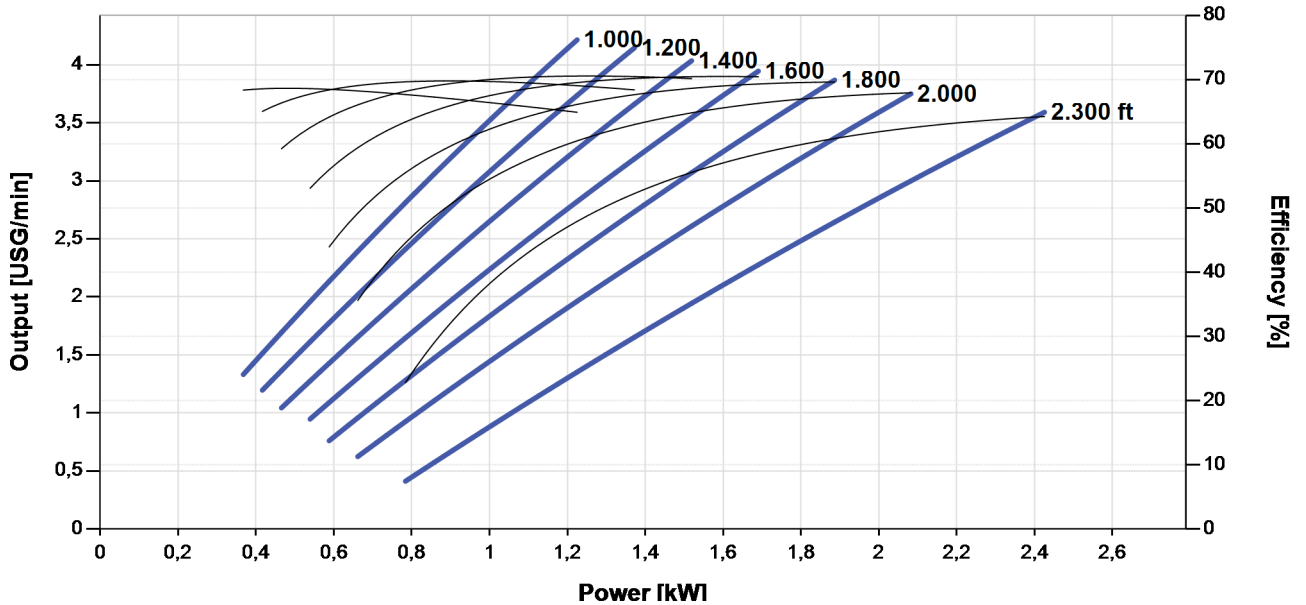

Dimensions and Weights


Controller

- H1 = 14 in
- H2 = 13 in
- W1 = 8,1 in
- W2 = 6,7 in
- W3 = 6,5 in
- D1 = 4,9 in



Pump Unit

- A = 57 in
- B = 11 in
- C = 46 in
- D = 3,8 in
- S = 1 in

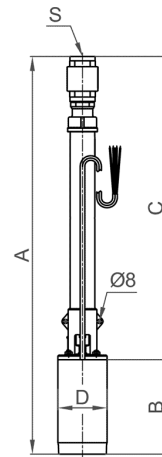

	Net weight
Controller	13 lbs
Pump Unit	44 lbs
Motor	22 lbs
Pump End	22 lbs

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

